



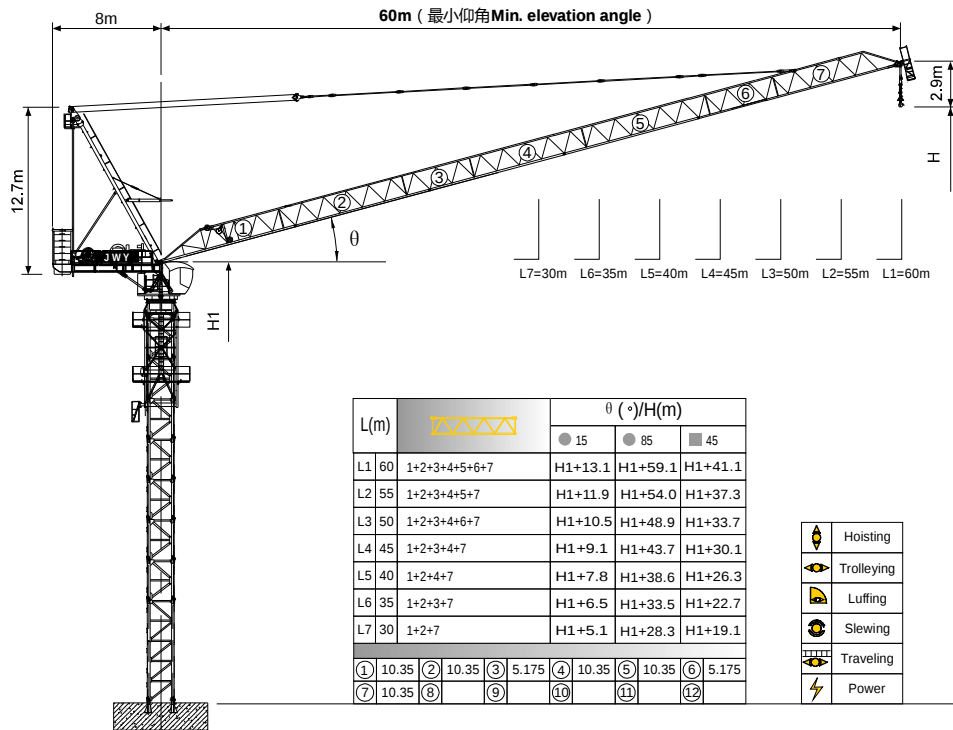

臂根铰点高度 Jib root hinge height

如果需要特殊高度请与我们联系。Please consult with us in case higher freestanding height needed.

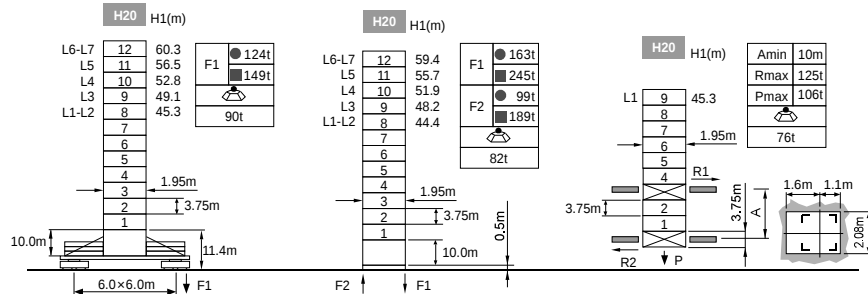


● 工作状态 In service F 反力 Reactions ■ 非工作状态 Out of service
自重 (不含平衡重及压重) total weight of free standing height (excludes counter weight and ballast)

负荷特性 Load diagrams

R	falls	R(C _{MAX})	C _{MAX}	m	20	22	25	27	30	32	35	37	40	42	45	47	50	52	55	57	60
60m	1	5.4~36.5	9	t	9.0	9.0	9.0	9.0	9.0	9.0	9.0	8.8	7.6	7.0	6.1	5.6	4.8	4.4	3.8	3.5	3.0
	2	5.4~28.2	13.5	t	13.5	13.5	13.5	13.5	12.3	11.1	9.6	8.8	7.6	7.0	6.1	5.6	4.8	4.4	3.8	3.5	3.0
55m	1	5.0~37.1	9	t	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	7.9	7.2	6.3	5.8	5.1	4.7	4.1		
	2	5.0~28.5	13.5	t	13.5	13.5	13.5	13.5	12.5	11.4	9.9	9.1	7.9	7.2	6.3	5.8	5.1	4.7	4.1		
50m	1	4.5~37.7	9	t	9.0	9.0	9.0	9.0	9.0	8.7	9.0	8.1	7.5	6.6	6.1	5.3					
	2	4.5~28.9	13.5	t	13.5	13.5	13.5	13.5	12.8	11.6	10.1	9.3	8.1	7.5	6.6	6.1	5.3				
45m	1	4.1~37.7	9	t	9.0	9.0	9.0	9.0	9.0	8.7	9.0	8.1	7.5	6.6							
	2	4.1~28.9	13.5	t	13.5	13.5	13.5	13.5	12.8	11.6	10.1	9.3	8.1	7.5	6.6						
40m	1	3.6~37.7	9	t	9.0	9.0	9.0	9.0	9.0	8.7	9.0	8.1									
	2	3.6~28.9	13.5	t	13.5	13.5	13.5	13.5	12.8	11.6	10.1	9.3	8.1								
35m	1	3.2~35.5	9	t	9.0	9.0	9.0	9.0	9.0	8.7											
	2	3.2~28.9	13.5	t	13.5	13.5	13.5	13.5	12.8	11.6	10.1										
30m	1	2.7~30.0	9	t	9.0	9.0	9.0	9.0	9.0												
	2	2.7~28.9	13.5	t	13.5	13.5	13.5	13.5	12.8												

附着 Anchorages

H20 塔身高度 Tower body height

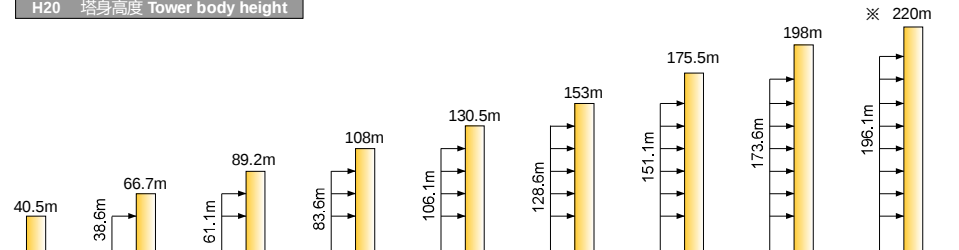

※ 超过此高度请联系我们 Over this height please contact us

机构 Mechanisms

	100LVF45	m/min	0~50	0~74	75kW	820m >820m※
			9	4.5		
		m/min	0~33	0~49		
			13.5	6.75		
	75VVF45	m/min	0~25	0~37	55kW	
			18	9		
	RCV145	rpm	2min40s		2x7.5kW	
	RT443	m/min	0~0.7		4x5.2kW	
		m/min	0~25			
			380V 50Hz(±5%) 440V 60Hz(±5%)		200kVA	kVA

※ 请联系我们 Please consult us

△ 可选 Option